REVISIONS				
ZONE	LTR	DESCRIPTION PROJ. # 256A	DATE	APPROVED
B-5 B-4	C	1: .334/.294 W/S .292 ±.013 1: .155/.125 W/S .117/.137 2: .065/.071 W/S .078 ±.007 CR#28938. GF	4-11-96	S.B.M.

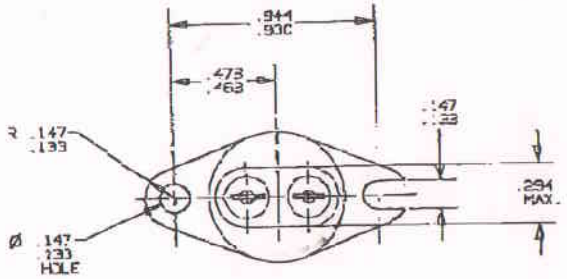

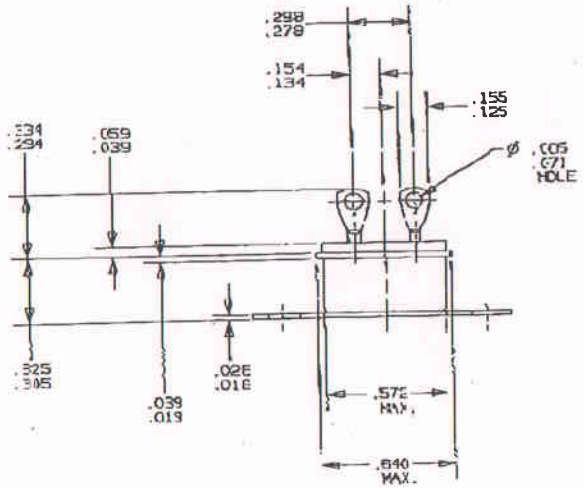

M24236/1-0310

PART NO. ---------- 11041-5:*561

OPERATING TEMPERATURE:
OPEN: ---------- 155 °F. 5 °F.
CLOSE: ---------- 135 °F. 5 °F.

FINISH: ----------

WEIGHT: ---------- 5.5 GRAMS MAX.

AMBIENT TEMPERATURE EXPOSURE RANGE: ---------- -65°F. TO +450°F.

ELECTRICAL CIRCUIT DIAGRAM: ----------



FOR REFERENCE ONLY
CHECK LATEST REVISION
BEFORE USE
Date FEB 9 1998

ELECTRICAL RATING RESISTIVE

30 VAC/DC	125 VAC	250 VAC	LIFE CYCLES
AMPERES			
5.0	2.0	1.0	100,000
5.5	3.0	1.5	50,000
6.0	4.0	2.0	25,000
6.5	5.0	2.5	10 000
7.0	6.0	3.0	5,000

DIELECTRIC STRENGTH TERMINAL TO CASE: -------- 1250 VOLTS, RMS, 60 CYCLES FOR 1 MINUTE

NOTE: *
FOR ORDERING PRODUCTION QUANTITIES TWO DASH NUMBERS ARE NECESSARY. THE SECOND DASH NO. WILL BE ASSIGNED WHEN OPERATING CHARACTERISTICS AND DESIGN DETAILS ARE ESTABLISHED.

SUPERSEDES DWG. 11041-51 REV. "B", DATED 2-7-85

04 P17

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN J.D. MAYAL	DATE 5-14-82	TEXAS INSTRUMENTS ATTLEBORO, MASSACHUSETTS 02703 — KLIXON by CONTROL PRODUCTS DIVISION
TOLERANCES ON FRACTIONS DECIMALS ANGLES	ENGINEER S.B. MARCUS	4-11-96	
MATERIAL	APPROVED		TITLE: 11041-51 THERMOSTAT SPST AUTO. RESET SEALED ENVELOPE DRAWING
	APPROVED		SIZE: B
			ZONE DRGMT NO. 82647 — 11041-51
	SIGNATURES ON FILE. REFER TO ELECTRONIC CHANGE NOTICE.		

FLAME ENTERPRISES INC.
EXT#: 708-916#*FAX#: 708-1905
PH 800-854-2255
DEAN ORBELY EXT 116
E-MAIL: deanorbely@earthlink.net

JAY-21-02 MON 2:54 PM