



Basic socket series designation for :  
Series WN460

Meets the requirements of:  
MIL-DTL-12883


**SOLDER CUP FOR 20AWG WIRE SIZE**

**BOTTOM MOUNTING**  
MONTAGE SOUS STRUCTURE  
HRCC-1JV2

**TOP MOUNTING**  
MONTAGE SUR STRUCTURE  
HRCC-2JV2



PANEL THICKNESS : 1.6mm

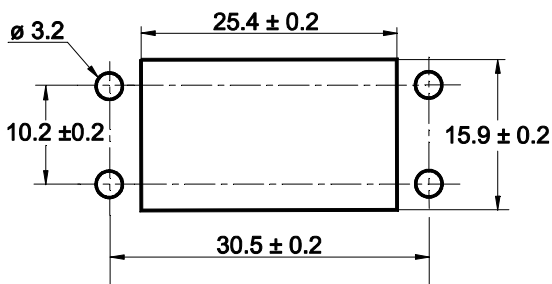

**GENERAL CHARACTERISTICS**  
CARACTERISTIQUES GENERALES

Dimensions in mm  
Tolerances, unless otherwise specified,  $\pm 0.12$ mm

Supplied with mounting hardware / Fourni avec visserie	
Temperature range / Température d'utilisation	-65° C to +125° C.
Weight / Masse	66g max.
Dielectric Strength at sea level / Rigidité diélectrique au niveau de la mer	1500 Vrms / 50 Hz Minimum
Gold plated contact per MIL-G-45204 / Contact broche dorées selon MIL-G-45204	
Dallyl phthalate, glass-fiber filled per MIL-M-14	

**AMERICAS.**

Tel: +1 714-736-7599  
<http://www.esterline.com/powersystems>

**EUROPE.**

Tel: +33 3 87 97 31 01  
Fax: +33 3 87 97 96 86

**ASIA**

Tel: +852 2 191 3830  
Fax: +852 2 389 5803