





Basic socket series designation for:

Series K, TDH, VS

NOT qualified but designed to the standards and requirements of:


MIL-DLT-12883/40

SOCKET DRAWING

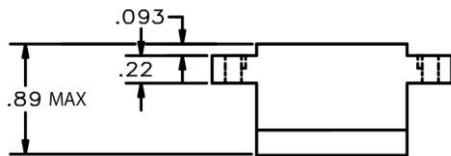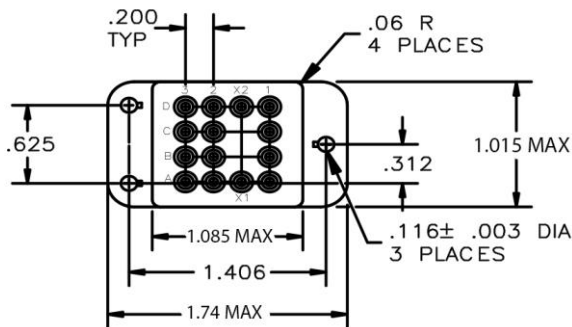


HARDWARE MOUNTING

MOUNTING DETAIL 3 PLACES

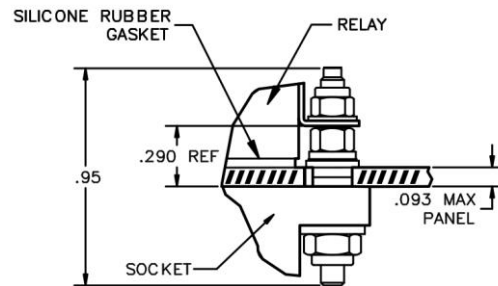

MOUNTING DIMENSIONS

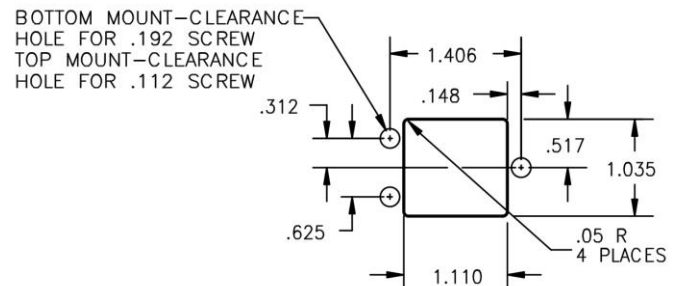

GENERAL CHARACTERISTICS

1. Supplied with mounting hardware, No. 16 contacts, No. 16 crimp (SO-1048-8308); No. 16 contacts, No. 20 crimp (SO-1048-8518)	
2. Standard tolerances	.xx ± .01; xxx ± .005
3. Weight	.115 lbs. max
4. Temperature range	-70° C to +125° C

AMERICAS.
 Tel: +1 714-736-7599
<http://www.esterline.com/powersystems>

EUROPE.
 Tel: +33 3 87 97 31 01
 Fax: +33 3 87 97 96 86

ASIA
 Tel: +852 2 191 3830
 Fax: +852 2 389 5803