




Basic socket series designation for:

Series X

NOT qualified but designed to the standards and requirements of:



MIL-DTL-12883/45

SOCKET DRAWING

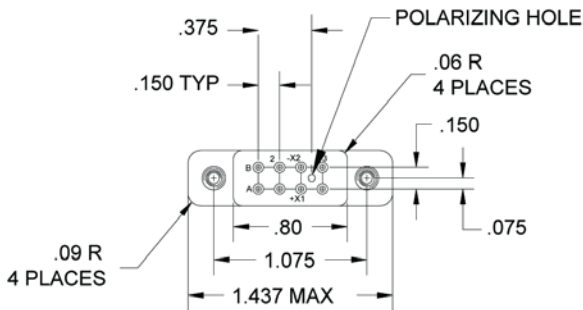


HARDWARE MOUNTING

MOUNTING DETAIL 2 PLACES

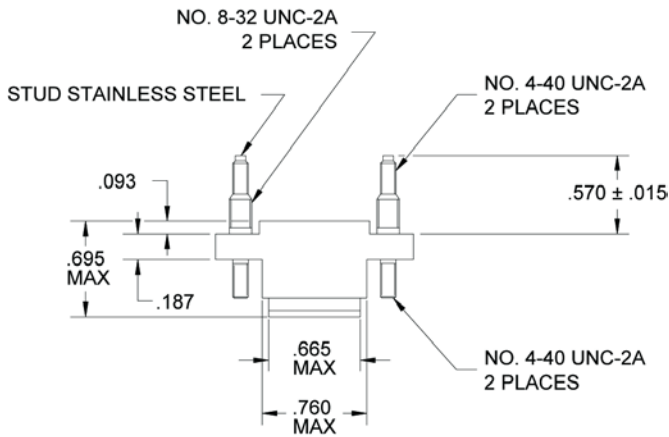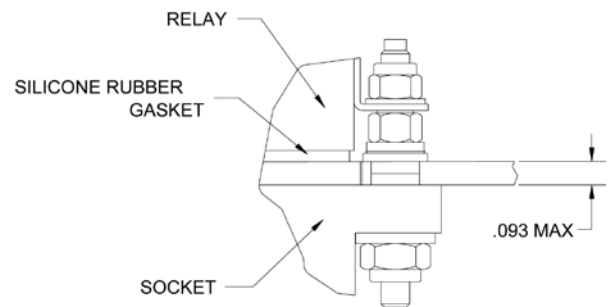

MOUNTING DIMENSIONS

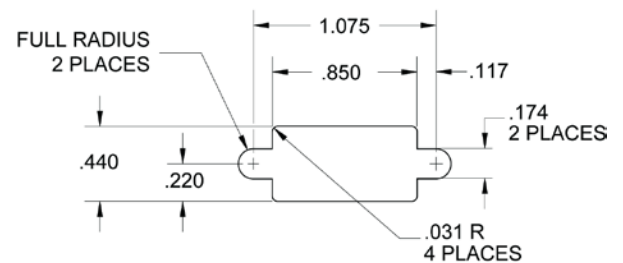

GENERAL CHARACTERISTICS

1. Supplied with mounting hardware and No. 20 contacts and No. 20 crimp.

2. Standard tolerances

.xx ± .01; xxx ± .005

3. Weight

.030 lbs. max

4. Temperature range

-65° C to +125° C

AMERICAS.

Tel: +1 714-736-7599

<http://www.esterline.com/powersystems>

EUROPE.

Tel: +33 3 87 97 31 01

Fax: +33 3 87 97 96 86

ASIA

Tel: +852 2 191 3830

Fax: +852 2 389 5803

1 / 1