



Line Replaceable Contactor (LRC)
Balanced-Force design

Designed to the
performance standards of

MIL-PRF-6106

Contact arrangement

3 PDT

PRINCIPLE TECHNICAL CHARACTERISTICS

Contacts rated at

28 Vdc and 115/200, 400Hz, 3Ø

Weight

2.37lbs max

Dimensions

3.63 in. x 3.63 in. x 3.70 in.

Special units available upon request, including models with auxiliary contacts and center-off contact arrangement.

CONTACT ELECTRICAL CHARACTERISTICS

Contact rating per pole and load type	Load current in Amps
	115/200 Vac, 400 Hz, 3Ø
Resistive	100
Inductive	100
Motor	65



Featuring **LEACH**® power and control solutions
www.esterline.com

AMERICAS
6900 Orangethorpe Ave.
P.O. Box 5032
Buena Park, CA 90622

Tel: (01) 714-736-7599
Fax: (01) 714-670-1145

EUROPE
2 Rue Goethe
57430 Sarralbe
France

Tel: (33) 3 87 97 31 01
Fax: (33) 3 87 97 96 86

ASIA
Units 602-603 6/F Lakeside 1
No.8 Science Park West Avenue
Phase Two, Hong Kong Science Park
Pak Shek Kok, Tai Po, N.T.
Hong Kong
Tel: (852) 2 191 3830
Fax: (852) 2 389 5803

Data sheets are for initial product selection and comparison. Contact Esterline Power Systems prior to choosing a component.

COIL CHARACTERISTICS (Vdc)**SERIES Z-X9YN**



Nominal operating voltage	28 Vdc
Pick-up voltage	18 Vdc
Drop-out voltage	1.5 to 7 Vdc
Maximum pick-up time	50 ms
Maximum drop-out time	20 ms at 28 Vdc
Maximum pick-up current	4 Amp (shall not trip a 5 Amp circuit breaker)
Maximum hold current at 28 Vdc	.27 Amp
Minimum hold voltage	10 Vdc
Coil transient suppression	+/- 45 V max

GENERAL CHARACTERISTICS


Contact Data	Main Contacts	Aux Contacts
-Configuration	3PDT	3X 1PDT
-Supply voltage	115/200 Vac	28 Vdc
-Continuous current	100 Amp at .65PF	5 Amp resistive
-Rupture current	1000 Amp	-
-Overload	400 Amp	-
-Maximum contact bounce	3 ms	5 ms
-Simultaneous operation	5 ms	5 ms
Electrical life		
-At 45,000 ft	25,000 operations	
-At ambient pressure	25,000 operations	
Mechanical life	100,000 operations	
Altitude	45,000 ft	
Continuous operating temperature range	-15°C to +65°C	

NUMBERING SYSTEM

	Z-X9YN - XXX
Basic series designation_____	
Customer configuration_____	

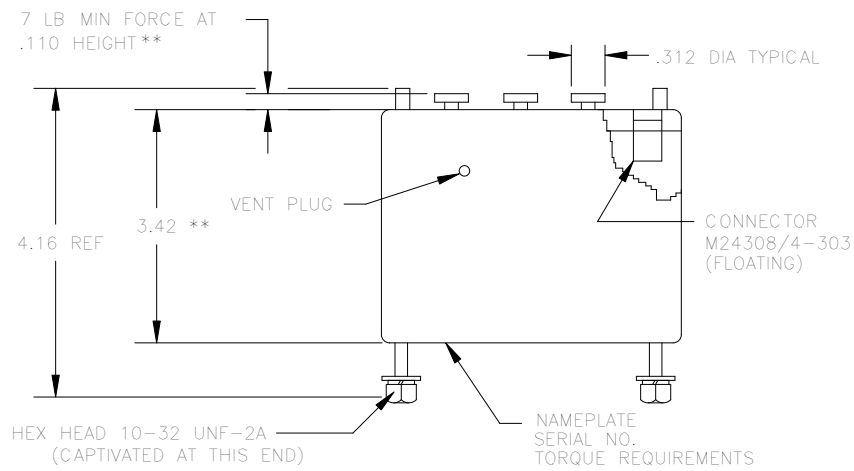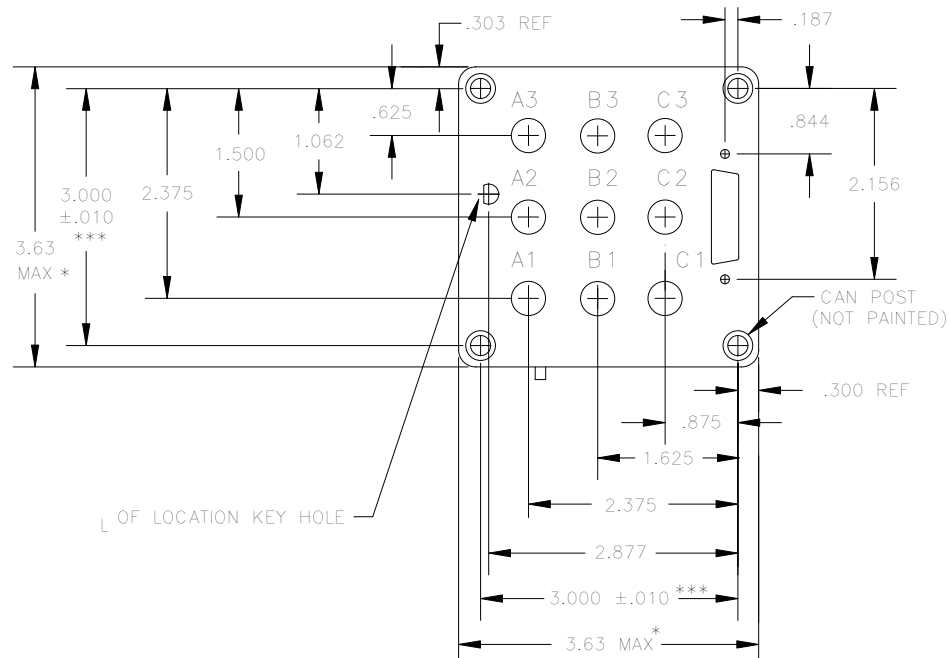

SCHEMATIC

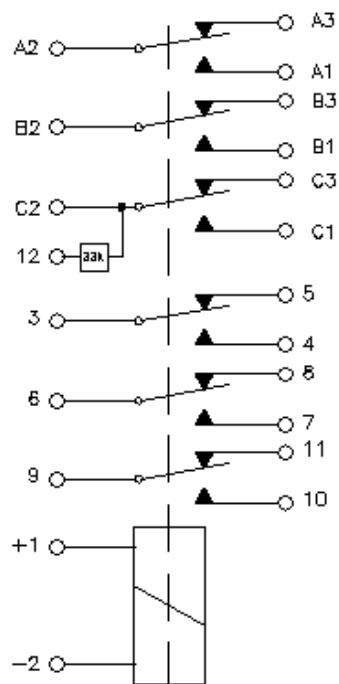

100 A LINE CONTACTOR ELECTRICAL SCHEMATIC