


122 SERIES


SPECIFICATIONS



- PCB Mounting Ø3mm LED
- Material conforms to UL94 V-O flammability ratings
- Color diffused lens, white diffused for bi-color options
- Reverse polarity options available
- Custom built multi-color permutations available
- Typically available ex stock
- Designed for auto-insertion onto printed circuit board
- Range of LED colors
- Range of voltage options

Complete online datasheet: <http://ds.leds.co.uk/ds/122series.pdf>

DIMENSIONS

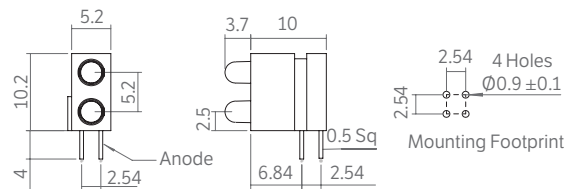

Actual size.
All dimensions measured in mm.

151 SERIES


SPECIFICATIONS



- Ø5.0mm LED
- Material conforms to UL94 V-O flammability ratings
- Diffused lens
- Typically available ex stock
- Red, amber and green tri-color
- Red and green bi-color

Complete online datasheet: <http://ds.leds.co.uk/ds/151series.pdf>

DIMENSIONS

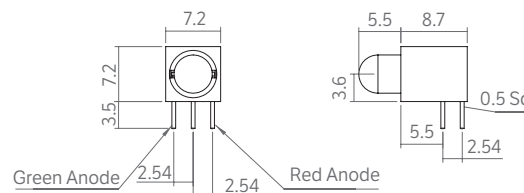

Actual size.
All dimensions measured in mm.