

508 SERIES


SPECIFICATIONS



- $\varnothing 8.1\text{mm}$ mounting (0.318")
- Robust bright nickel plated brass housing
- Low profile lens styling
- Smoked lens
- Sealed to IP67
- Suitable for high vibration applications
- Internal reverse protection diode fitted as standard in all voltage models
- Range of LED colors
- Range of voltage options
- Flying lead terminations available

Complete online datasheet: <http://ds.leds.co.uk/ds/508series.pdf>

DIMENSIONS

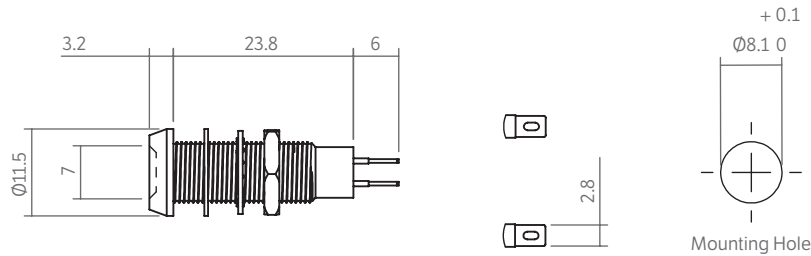

Anode termination indicated by red sleeve.
Mounting hole to be clean and burr free.

Actual size.
All dimensions measured in mm.

512 SERIES


SPECIFICATIONS



- $\varnothing 12.7\text{mm}$ mounting (0.500")
- Robust bright nickel plated brass housing
- Sealed to IP67, suitable for high vibration applications
- Smoked lens style
- Flying lead terminations available
- Internal reverse protection diode fitted as standard in all voltage models
- Range of LED colors
- Range of voltage options

Complete online datasheet: <http://ds.leds.co.uk/ds/512series.pdf>

DIMENSIONS

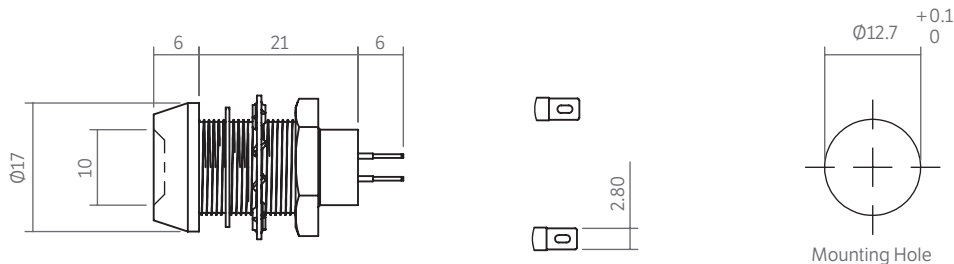

Anode termination indicated by red sleeve.
Mounting hole to be clean and burr free.

Actual size.
All dimensions measured in mm.