

514 SERIES


SPECIFICATIONS



- $\varnothing 12.7\text{mm}$ mounting (0.500")
- Robust bright nickel plated brass housing
- Raised profile styling with a color diffused lens
- Sealed to IP67
- Suitable for high vibration applications
- Internal reverse protection diode fitted as standard in all voltage models
- Range of LED colors
- Range of voltage options
- Flying lead terminations available

Complete online datasheet: <http://ds.leds.co.uk/ds/514series.pdf>

DIMENSIONS

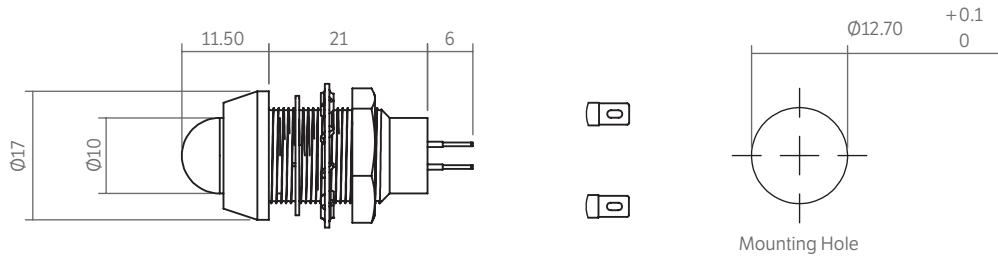


Anode termination indicated by red sleeve.
Mounting hole to be clean and burr free.

Actual size.
All dimensions measured in mm.

515 SERIES


SPECIFICATIONS



- $\varnothing 12.7\text{mm}$ mounting (0.500")
- Robust bright nickel plated brass housing
- Atex approved to EN50028 (EN50014)
- Sealed to IP67
- Color diffused lens
- Wide viewing angle
- Suitable for high vibration applications
- Range of LED colors

Complete online datasheet: <http://ds.leds.co.uk/ds/515series.pdf>

DIMENSIONS

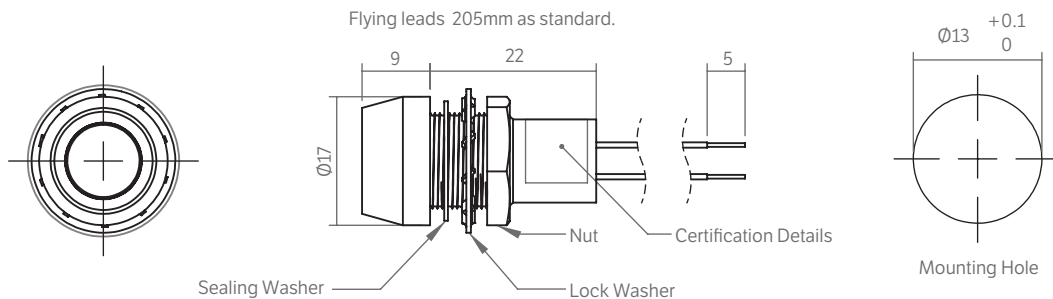

Actual size.
All dimensions measured in mm.