

# 520 SERIES


## SPECIFICATIONS



- $\varnothing 6.1\text{mm}$  (0.240") mounting
- Robust stainless steel housing
- Counter sunk mounting for flush styling
- Sealed to IP67, vandal resistant
- Sunlight readable LEDs with a color diffused lens
- Internal reverse protection diode fitted as standard in all voltage models
- Range of LED colors
- Range of voltage options
- Flying lead terminations available

Complete online datasheet: <http://ds.leds.co.uk/ds/520series.pdf>

## DIMENSIONS

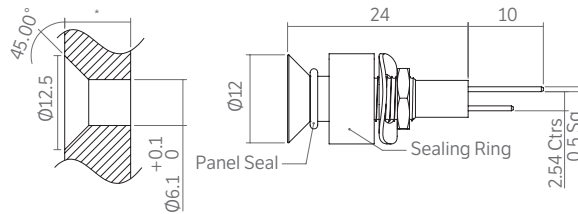

\*Min/max panel thickness is 3mm / 6.5mm. Anode termination indicated by long pin.  
Mounting hole to be clean and burr free.

Actual size.  
All dimensions measured in mm.

# 524 SERIES


## SPECIFICATIONS



- $\varnothing 8.1\text{mm}$  (0.318") mounting
- Robust stainless steel housing
- Sealed to IP67
- Suitable for high vibration applications
- Low profile lens styling with a wide viewing angle
- Sunlight readable LEDs
- Internal reverse protection diode fitted as standard in all voltage models
- Range of LED colors
- Range of voltage options

Complete online datasheet: <http://ds.leds.co.uk/ds/524series.pdf>

## DIMENSIONS

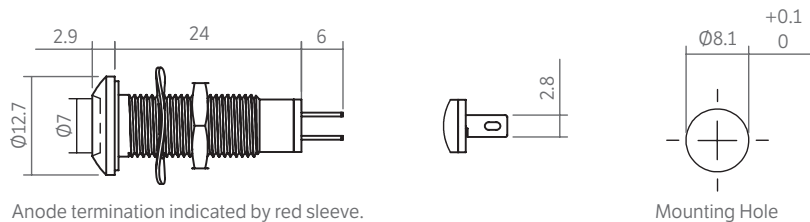

Anode termination indicated by red sleeve.  
Mounting hole to be clean and burr free.

Actual size.  
All dimensions measured in mm.