

# 525 SERIES


## SPECIFICATIONS



- $\varnothing 8.1\text{mm}$  (0.318") mounting
- Sealed to IP67
- Suitable for high vibration applications
- Reverse voltage protection
- Wide viewing angle
- White lens for diffusion of color
- Nickel plated brass body with anti-rotation flat
- Range of multi LED colors from a single indicator

Complete online datasheet: <http://ds.leds.co.uk/ds/525series.pdf>

## DIMENSIONS

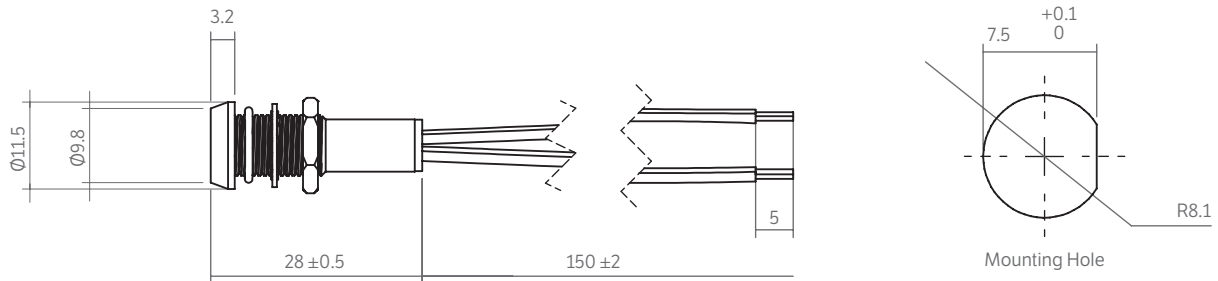

Actual size.  
All dimensions measured in mm.

# 528 SERIES


## SPECIFICATIONS



- $\varnothing 13.0\text{mm}$  (0.500") mounting
- Robust stainless steel housing, sealed to IP67
- Low profile, color diffused lens styling
- Sunlight readable LEDs
- Suitable for high vibration applications
- Internal reverse protection diode fitted as standard in all voltage models
- Range of LED colors
- Range of voltage options
- Flying lead terminations available

Complete online datasheet: <http://ds.leds.co.uk/ds/528series.pdf>

## DIMENSIONS

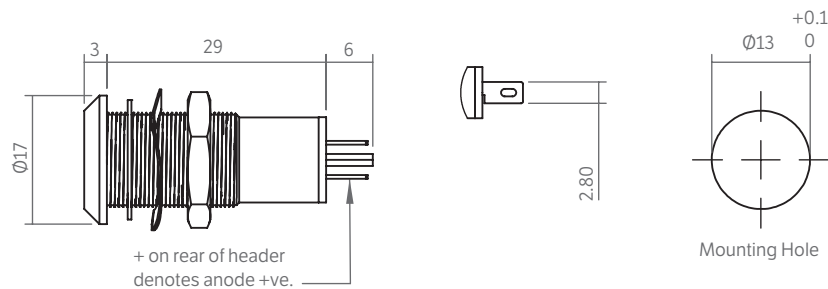

Actual size.  
All dimensions measured in mm.