

# 531 SERIES


## SPECIFICATIONS



- $\varnothing 12.7\text{mm}$  (0.500") mounting
- Robust bright nickel plated brass housing
- Product will operate over a wide voltage range
- Full internal potting for use in high vibration applications
- Sealed to IP67
- True bi-polar product for low voltage DC applications
- Other voltages, including DC options are available
- Range of LED colors
- Range of voltage options
- Flying lead terminations available

Complete online datasheet: <http://ds.leds.co.uk/ds/531series.pdf>

## DIMENSIONS

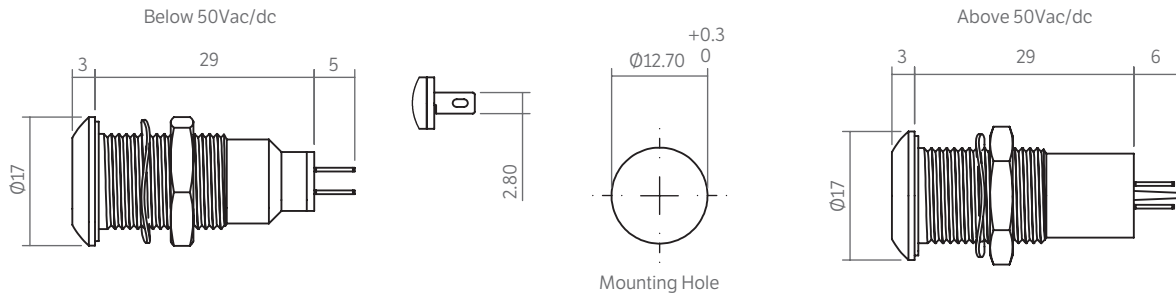

Actual size.  
All dimensions measured in mm.

# 534 SERIES


## SPECIFICATIONS



- $\varnothing 8.1\text{mm}$  (0.318") mounting
- Product will operate over a wide voltage range
- Robust stainless steel housing, sealed to IP67
- Color diffused lens
- Full internal potting to resist shock and vibration
- True bi-polar product for low voltage DC applications
- Other voltages, including DC options are available
- Range of LED colors
- Range of voltage options
- Flying lead terminations available

Complete online datasheet: <http://ds.leds.co.uk/ds/534series.pdf>

## DIMENSIONS

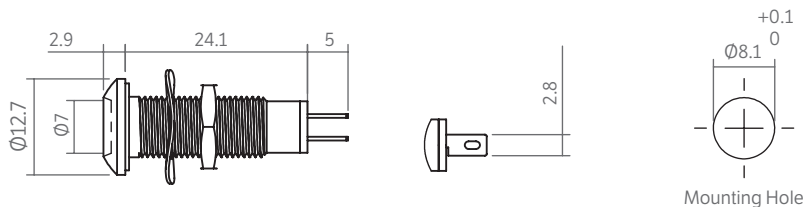

Actual size.  
All dimensions measured in mm.