

604 SERIES


SPECIFICATIONS



- $\varnothing 5.0\text{mm}$ (0.197") mounting
- Robust bright nickel plated brass housing
- Sealed to IP67
- Smoked lens with a wide viewing angle
- Suitable for high vibration applications
- Internal reverse protection diode fitted as standard in all voltage models
- Range of LED colors
- Range of voltage options
- Flying lead terminations available

Complete online datasheet: <http://ds.leds.co.uk/ds/604series.pdf>

DIMENSIONS

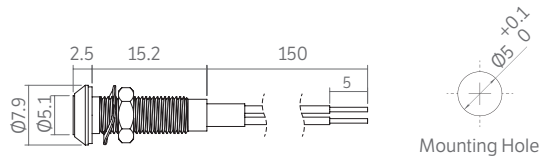

Actual size.
All dimensions measured in mm.

612 SERIES


SPECIFICATIONS



- $\varnothing 6.35\text{mm}$ (0.250") mounting
- Black anodized aluminum housing, sealed to IP67
- Internal reverse protection diode fitted as standard in all voltage models
- Smoked lens
- Flying lead terminations available
- Ideal for high vibration applications
- Range of LED colors
- Range of voltage options

Complete online datasheet: <http://ds.leds.co.uk/ds/612series.pdf>

DIMENSIONS

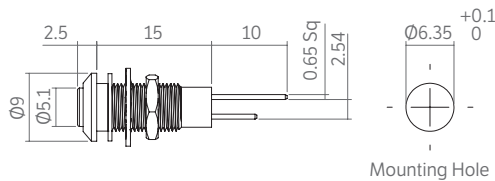

Actual size.
All dimensions measured in mm.