


QR-50 Series Relay, AC Current Indicator, Rated up to 5 Amps, 115 VAC

Product Facts

- SPST NC
- Environmentally sealed
- Meets many requirements of MIL-PRF-6106

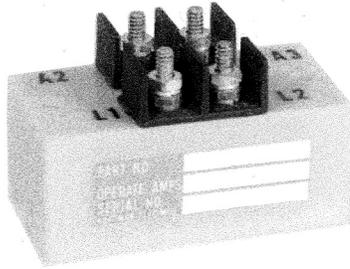

Performance Data

Electrical Characteristics

Contact Arrangement — SPST NC

Resistive Rating @ 28 Vdc — .25 Amp

Lamp Load @ 28 Vdc — .10 Amp

Sensing Current Rating — 5 Amp, AC continuous

General Characteristics

Temperature Range — -55°C to +85°C


Altitude — 50,000 ft

Weight, Max. — .25 lbs


Operating Voltage, Nom. — 115 Vrms, 325-600 Hz

Pickup Max. — 95 MA, AC

Dropout Min. — 47 MA AC

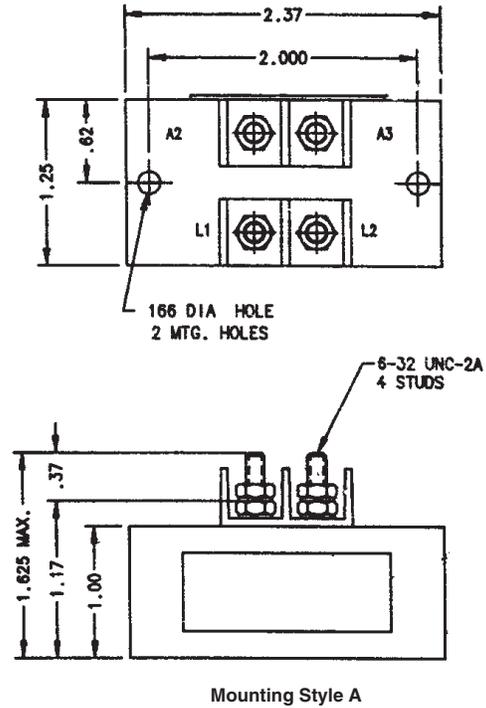

Circuit Configurations (Consult factory for other available circuit configurations)



For factory-direct application assistance, phone 419-521-9500 or fax 419-526-2749.

HARTMAN Part Number	Construction Type	Mounting Style	Duty Cycle	Circuit Config.	TE Part Number
QR-50V	Environmentally Sealed	A	Continuous	1	1616132-3