

SO-1058-8913 RELAY SOCKET **25 AMP**



Designed to the standards and requirements of:


MIL-DTL-12883/41


HARDWARE MOUNTING

MOUNTING DETAIL 3 PLACES


RELAY


SOCKET DRAWING



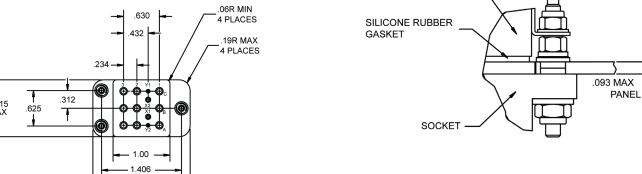

MOUNTING DIMENSIONS SUGGESTED MOUNTING **HOLE LAYOUT**

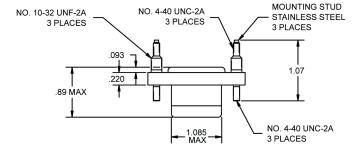



GENERAL CHARACTERISTICS

1. Supplied with mounting hardware No. 12, 16 and 20 contacts, No. 12, 16 and 20 crimps.	
2. Standard tolerances	.xx ±.01; xxx ± .005
3. Weight	.120 lbs. max
4. Temperature range	-65° C to +125° C

(714) 736-7598 • leachcorp.com • LINA.CustomerService@LeachCorp.com