

SO-1063-9036 RELAY SOCKET 25 AMP




Basic socket series designation for:	


JCL

Meets the requirements of:


MIL-S-12883

SOCKET DRAWING






HARDWARE MOUNTING



MOUNTING DIMENSIONS

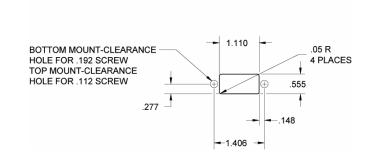

GENERAL CHARACTERISTICS

Supplied with mounting hardware and No. 12 contacts and crimp for power terminals; No. 16 contacts and crimp for X coil; No. 22 contacts and crimp for Y coil.		
Temperature range	-70° C to +125° C	
Weight	.060 lbs. max	
Standard tolerances	.xx ±.01; xxx ±.005	

(714) 736-7598 • leachcorp.com • LINA.CustomerService@LeachCorp.com