

### FEATURES

- BA15d Bayonet Cap
- 4 LED Cluster
- Range of LED colour options
- Range of voltage options
- Vac/dc Bi-Polar
- Internally potted
- Fit and Forget
- Warm White version available

### BENEFITS

- Direct replacement for standard bulb fitting
- Even illumination across 16mm diameter
- No colour filter required
- Manufactured with internal resistor
- Suitable for AC or DC & prevents wrong polarity installation
- Ideal for high vibration applications
- Outstanding reliability
- Warm white LED may be used behind coloured lens as a true replacement for a filament lamp

Marl Part Number	LED Colour	Typical Voltage Vopr	Typical Current DC Iopr	Typical LED Luminous Intensity	Typical LED Wavelength λp	Operating Temp Topr *	Storage Temp Tstg
240-064-64	Red	8-48	10	160	635	-40 ~ +100	-40 ~ +100
240-062-64	Amber	8-48	10	207	601	-40 ~ +110	-40 ~ +110
240-065-64	Green	8-48	10	348	524	-40 ~ +110	-40 ~ +110
240-066-64	Blue	8-48	10	93	465	-40 ~ +110	-40 ~ +110
240-061-64	Warm White	8-48	10	390	See Below	-40 ~ +110	-40 ~ +110
240-063-64	Cool White	8-48	10	450	See Below	-40 ~ +110	-40 ~ +110
240-064-62	Red	48-130	4	128	635	-40 ~ +100	-40 ~ +100
240-062-62	Amber	48-130	4	173	601	-40 ~ +110	-40 ~ +110
240-065-62	Green	48-130	4	305	524	-40 ~ +110	-40 ~ +110
240-066-62	Blue	48-130	4	78	465	-40 ~ +110	-40 ~ +110
240-061-62	Warm White	48-130	4	325	See Below	-40 ~ +110	-40 ~ +110
240-063-62	Cool White	48-130	4	375	See Below	-40 ~ +110	-40 ~ +110
		Vac/dc	mA	mcd	nm	°C	°C

Typical Emission Colours Cool White LED						
X	0.280	0.264	0.283	0.330	0.361	0.356
Y	0.248	0.267	0.305	0.360	0.385	0.351

Typical Emission Colours Warm White LED						
X	0.3554	0.3610	0.3988	0.4390	0.4970	0.4588
Y	0.3408	0.3850	0.4116	0.4310	0.4466	0.3838

### NOTES

Intensities (Iv) and colour shades of white (X-Y co-ordinates) may vary between LEDs within a batch. Additional LED Colours and Voltage Options available for semi-custom projects.

Please contact our Sales Team. All LED components are supplied in anti-static packaging.

For this multi-LED cluster, luminous intensity is stated per single LED.

\* Characteristics at Ta = 25°C. For operating temperature derating graphs, please refer to sheet 2.

To order please contact us on +44 (0) 1229 582 430

F +44 (0) 1229 585 155 | E [sales@marl.co.uk](mailto:sales@marl.co.uk) | [www.leds.co.uk](http://www.leds.co.uk)

marleds in company/marl-international-limited



Q 05480

DSN 240 Version DS011/2020. Page 1 of 2


### TECHNICAL DATA

Series	Lamp Base Style	Metric Equivalent	Max. Power Dissipation
240	BA15d	15	225
		mm	mW


### TECHNICAL DRAWING

Weight (g): 13.2

Dimensions in mm (typical). Not to scale. Colour dot on product denotes LED colour.

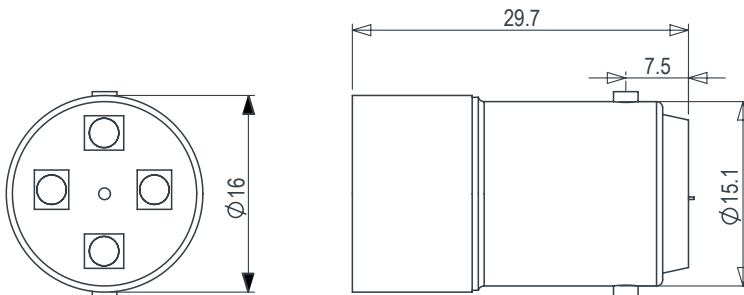

### DE-RATING GRAPHS

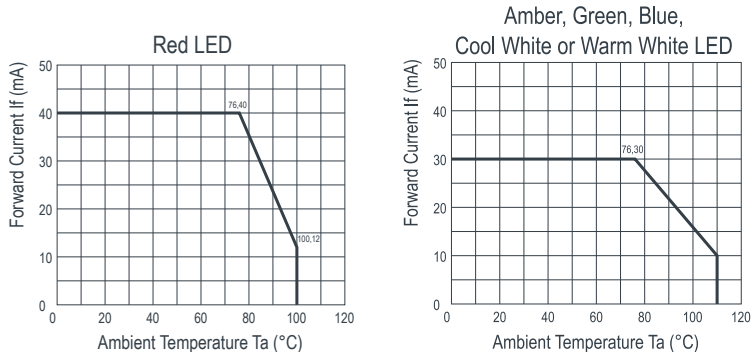

### DESIGN CONSIDERATIONS

#### Single-Chip LEDs

All devices feature water clear high intensity LEDs as standard. In devices where discrete LEDs are used, the single chip LED devices have been modified by the removal of the domed portion of the encapsulation (flat-topped) to provide even illumination of switches and annunciators. Non flat topped versions are also available. Flat-topping does not apply to devices using surface-mounted device (SMD) LEDs.

#### Product Evaluation

Filament replacement LEDs have been specifically designed to meet the primary objective of providing improved reliability. As this product range is suitable for both new-build and retro-fit, (sometimes in very old systems), a wide range of illuminated push button switches and lamp holders can be encountered. Due to subjectivity, evaluation of the LED type is recommended, (samples of all standard models are available). Care should be taken to correctly

simulate operating ambient light conditions to ensure that the correct device has been selected to maximise viewing characteristics such as viewing angle, colour compatibility and on/ off contrast ratio.

#### Electro-Static Discharge (ESD)

Build up of electro-static discharge occurs in many situations involving people moving and handling products. The range of possible situations is very diverse but voltage levels as high as several thousand volts can and do arise in many individual situations. When an operator charged up to these levels handles a static sensitive device, there is a very probable likelihood that the device will be irreversibly damaged. It is essential that precautions are taken at all stages during manufacture and assembly of these products. Although LEDs were never considered to be static sensitive devices, changes in manufacturing technology and materials used to produce higher intensity products over a large range of the wavelength spectrum

have changed this. MarL has an approved system of ESD control from goods in, through production and into final packing and dispatch. MarL recommend all users of LED based products follow the current BSI guidelines for protection of electronic devices from electrostatic phenomena.

#### Voltage, Current and Temperature

The forward voltage / current value of an LED is dependent upon the ambient temperature of the environment in which it is operated. Therefore, care must be taken to operate the LED at the correct voltage / current values, depending upon the ambient temperature.

MarL should be contacted if the device is to be operated outside the temperature range specified. MarL accept no liability for any product that is operated outside the stated voltage or temperature range.

To order please contact us on +44 (0) 1229 582 430

F +44 (0) 1229 585 155 | E [sales@marl.co.uk](mailto:sales@marl.co.uk) | [www.leds.co.uk](http://www.leds.co.uk)

marlleds company/marl-international-limited



Q 05480

