

| G311P641/02 SPACE-FLIGHT THERMOSTATS

S-311-P641/02 QUALIFIED M2 SERIES, NARROW DIFFERENTIAL, ½" HERMETIC

Introduction

Thermal engineers count on the reliability of Sensata KLIXON® M2 thermostats for the demanding environments required on satellites, launch vehicles, and manned space vehicles. For over sixty years, the tight set point temperatures, as well as exceptional vibration and shock resistance, enabled precise thermal control on satellites such as GPS III, JCSAT-9/-10, the Hubble Space Telescope, SPACE-X Dragon and many others. Each M2 Series Narrow Differential thermostat is vacuum baked and backfilled with inert dry nitrogen atmosphere prior to final sealing to prevent condensation at low temperatures or possible contact contamination at high temperatures.

All Sensata space-flight thermostats are assembled in a Class 100/ISO 5 cleanroom and undergo Group A Inspection per Table I of NASA S-311-P641. Inspections include pre-cap visual inspection, millipore cleaning, run-in, vibration, particle impact noise detection (PIND) in addition to the standard tests for calibration, creepage, seal, dielectric withstand voltage, insulation resistance, and contact resistance. Each individual thermostat is serialized and shipped with all inspection/screening test data included in the end item data package.



Features

- Narrow differential provides tight control signal for temperature control
- Single pole/single throw (SPST) bi-metallic snap disc design
- Preset temperature set points, non-adjustable calibration
- Vacuum backed and back-filled with dry nitrogen atmosphere
- Hermetically sealed to maximum leak rate of 1×10^{-8} cc He/second
- Qualified to MIL-PRF-24236/20
- 100% screened to NASA S-311-P641

Applications

- Battery systems
- Propulsion lines, thrusters, & rocket motors
- Optics, instrumentation, & electronic modules
- Hydraulic/pneumatic actuators
- Cold plates
- Electric motor pre-heaters & robotic arm controls



Requirements

Switching action	Single Pole, Single Throw (SPST)
Storage temperature range	-65°F to +335°F (-53.9°C to +168.3°C)
Operating temperature range	-40°F to +235°F (-40°C to +112.8°C), depending on calibrated temperature. Exposure is limited to 100°F above temperature for close on rise devices or 100°F below operating temperature for open on rise devices.
Contact rating, Resistive Load	2.0 amperes at 30Vdc/120Vac, 250,000 cycles 3.0 amperes at 31Vdc, 50,000 cycles
Contact resistance	0.025 ohms maximum, per MIL-STD-202, Method 307 initially and 0.050 ohms maximum after endurance testing
DWV	1250 VAC, rms, 60 cycles for 1 minute, terminal to case, per MIL-STD-202, Method 301
Vibration	10-2000 Hz, 10G, per MIL-STD-202, Method 204, Condition D (monitored)
Shock	100G, 6 milliseconds, per MIL-STD-202, Method 213
Seal, Hermetic	1 X 10 ⁻⁸ atm cc/sec. maximum, per MIL-STD-202, Method 112, Condition C
Finish	0.0003 - 0.0004 inches Ni per AMS-QQN-290 over 0.0002 - 0.0003 inches Cu per MIL-C-14550
Weight	5.4 grams (average)
Operating temperature	Temperature at which contacts close.
Differential	Subtract (for close on rise) or add (for open on rise) the differential from the closing temperature to determine the temperature at which the contacts will open.
Qualification	Qualification listing to MIL-PRF-24236/20 required.
Screening	Switches shall be subjected to 100% Group A screening inspection per S-311-P-641, Table 1, Test Nos. 1 – 12, with the following exception: PIND per manufacturer's GSFC approved internal test procedure; for PIND testing at temperatures below 0°F, consult factory.

Standard operating characteristics, differential and tolerances.

Closing Temperature Range °F [°C]	Opening Temperature Differential °F [°C]	Closing Temperature Tolerance °F [°C]
-40°F to +235°F (-40°C to 112.8°C)	2 to 5°F (1.1 to 2.8°C)	±4°F (±2.2°C)



DIMENSIONS

All dimensions are in millimeters

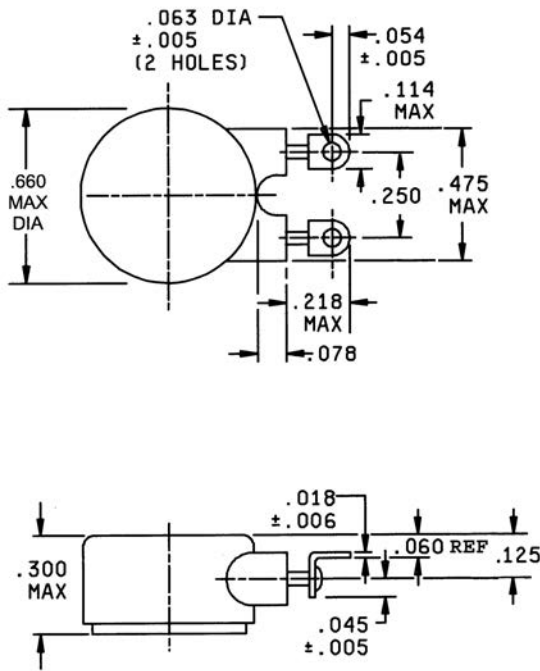


Figure 1
(G311P641/0211XXXXXXXXXX)

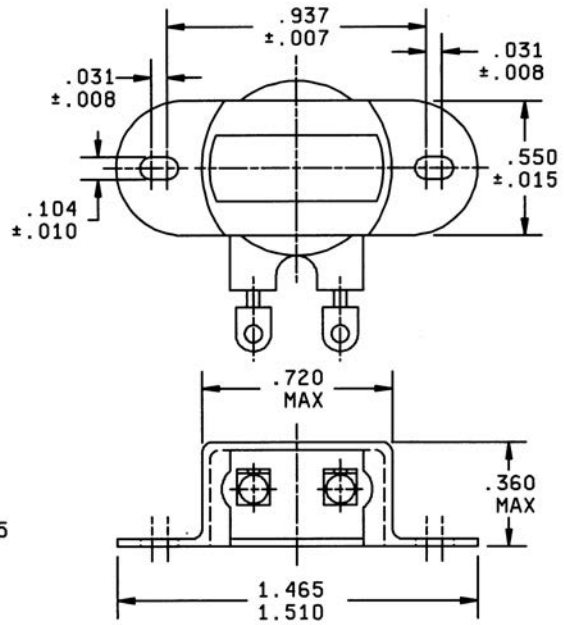


Figure 2
(G311P641/0221XXXXXXXXXX)

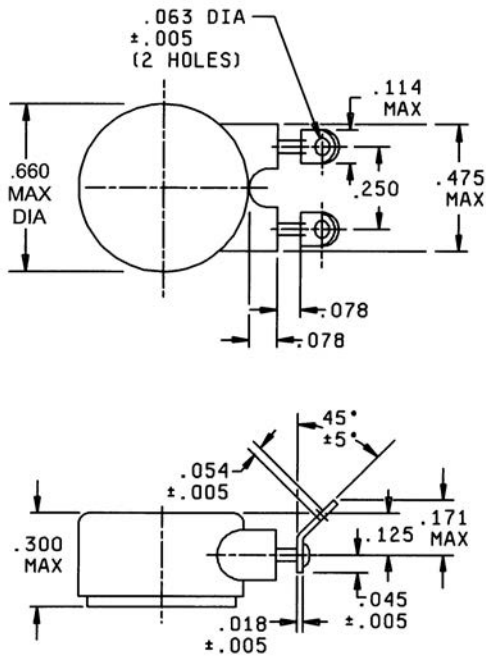


Figure 3
(G311P641/0212XXXXXXXXXX)

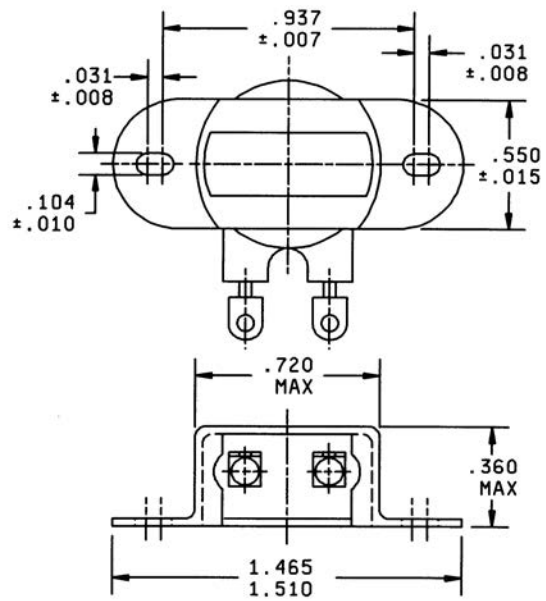


Figure 4
(G311P641/0222XXXXXXXXXX)

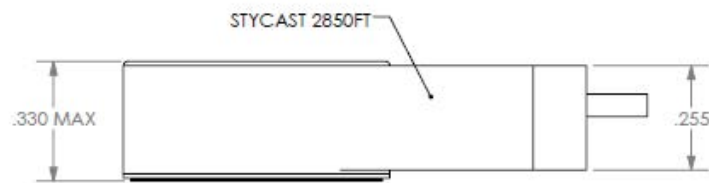
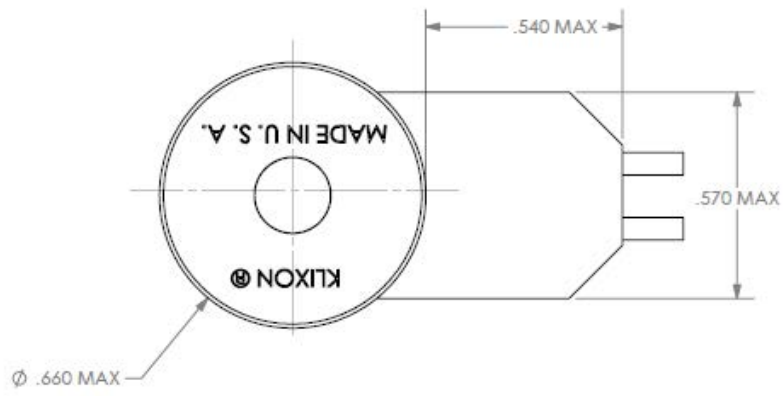


Figure 5 = Plain cup with wire leads and STYCAST overmold strain relief (G311P641/0211XXXXXXXXXX / X)

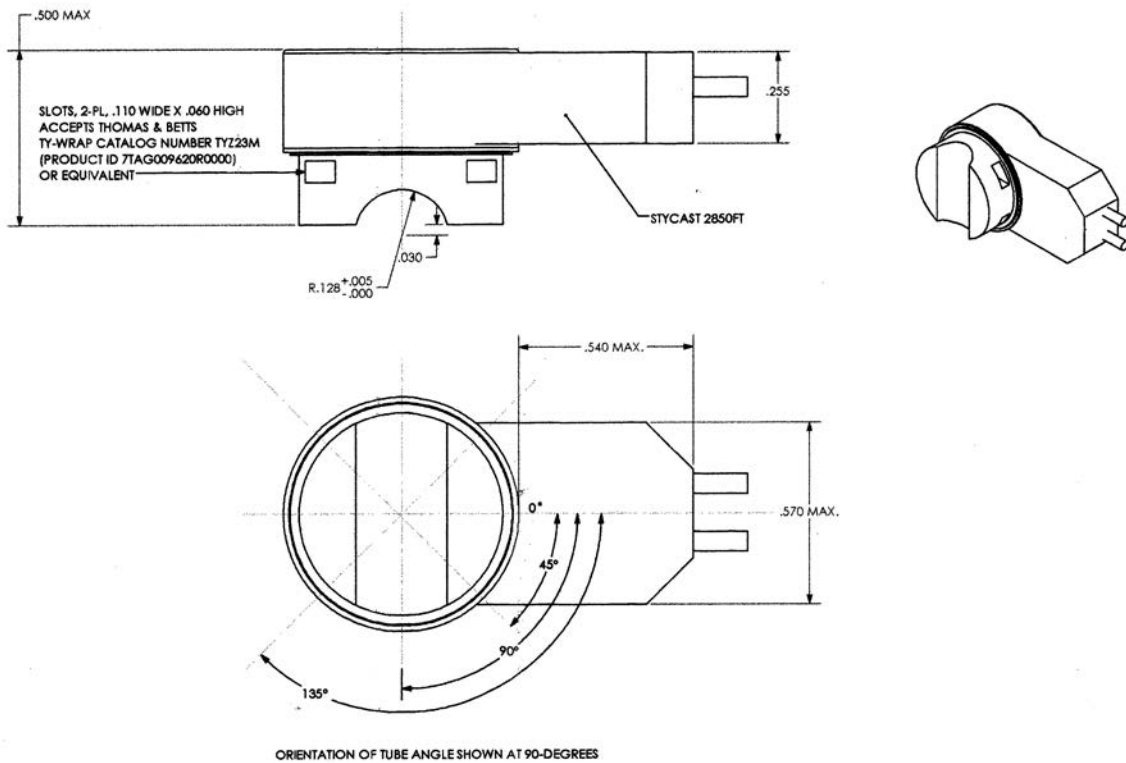


Figure 6
1/4" DIAMETER TUBE MOUNT

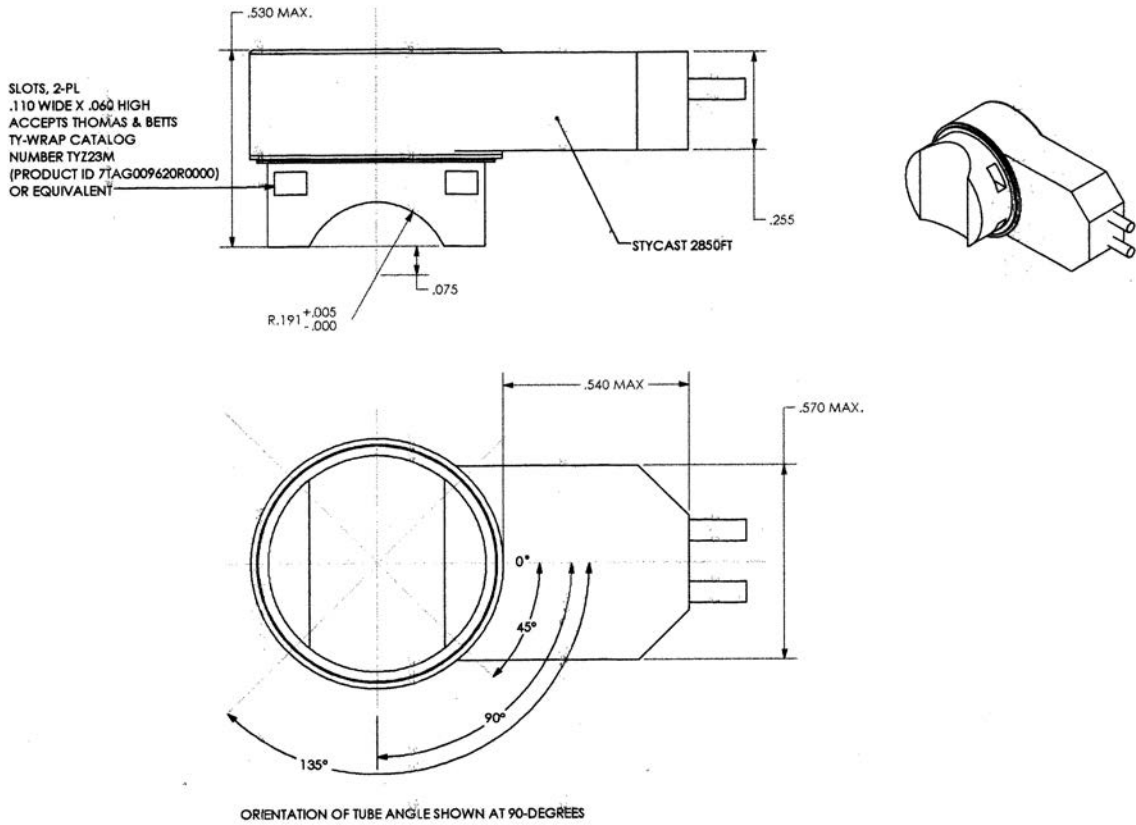


Figure 7
 3/8" DIAMETER TUBE MOUNT


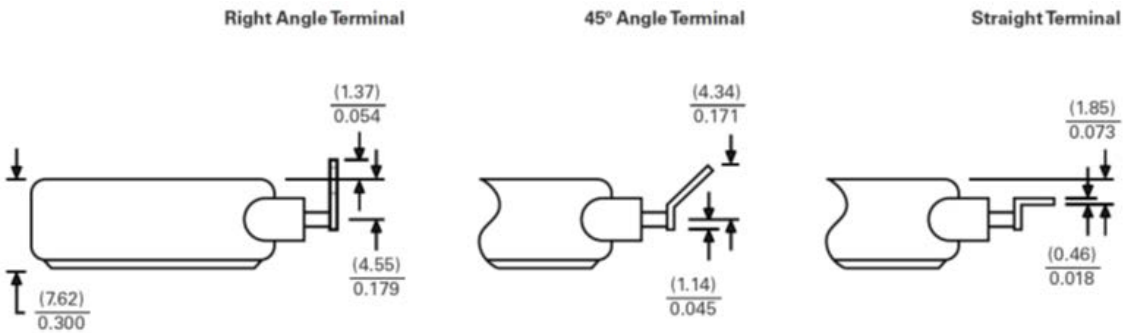


Figure 8
 Available Terminal Configurations



ORDERING OPTIONS

Example : G311P641/0211L163030521 / A A 1

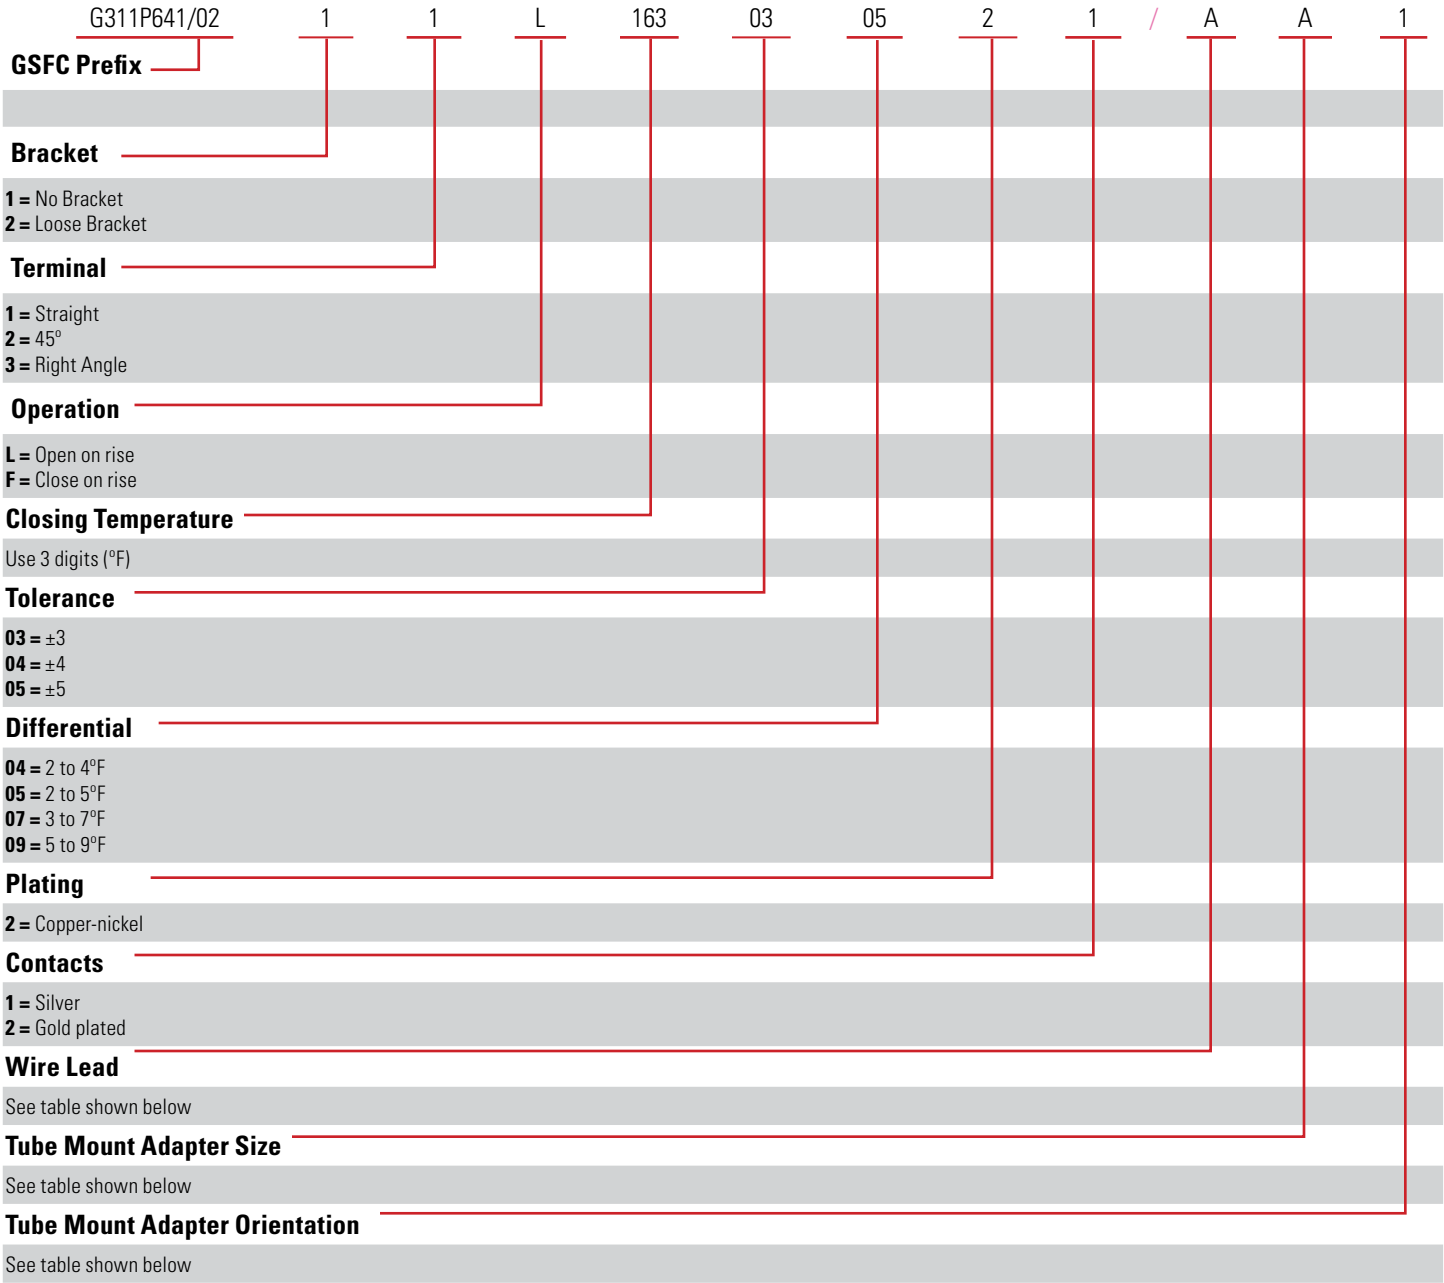



WIRE LEAD & TUBE MOUNT ADAPTER OPTIONS

Wire Lead Ordering Code	Wire Type	Lead Length +/-10% Inch (mm)	Stycast Overmold (See Figure 5)
A	M22759/11-22-0	59.0 (1500)	STYCAST 2850FT
B	M22759/33-22-0	59.0 (1500)	
C	M22759/43-22-0	59.0 (1500)	

Tube Mount Size Ordering Code	Tube Mount Adapter Diameter Inch (mm)
A	.256 +.010/-.000 (6.50 +.25/-.000)
B	.381 +.010/-.000 (9.68 +.25/-.000)

Tube Mount Orientation Ordering Code	Tube Mount Adapter Mounting Angle (+/-10°)
1	0° (Terminal Orientation Parallel To The Tube Direction)
2	45°
3	90°
4	135°

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

CONTACT US

Americas
+1 (508) 236-3800
Ask for Aerospace team
klixon@sensata.com